Specifications



Last revision: 09/07/2016 aquabrass.com

DEMI-TOTEM 12123

1/2" thermostatic valve with 2-way or 3-way diverter - CALGreen



FEATURES

High performance 1/2" thermostatic valve
European made solid brass rough and thermo cartridge
Safety temperature limit stopper, preset at 38C / 100F
Reversible service check valves with filters / stop valves
1/2" NPT female connection (outlet/inlet)
Diverter cartridge not included
Available a third outlet if required


Flow rate: 12gpm at 45psi


WARRANTY

Residential: Limited lifetime warranty to original purchaser

Commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)

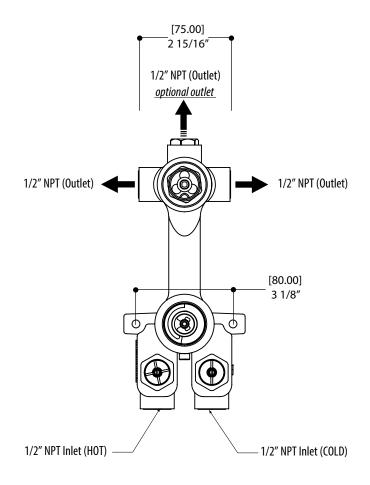

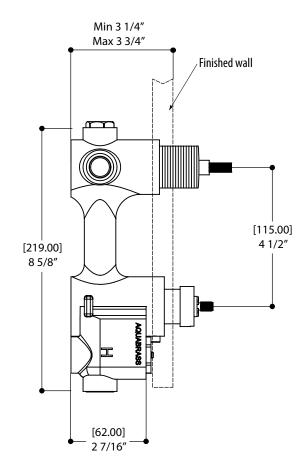

Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc.

last revision: 16/09/2016

aquabrass.com





2-way shared functions

2-way 1 function at a time

3-way shared functions

3-way 1 function at a time

round

FEATURES

Solid brass construction
Screwless decorative trim
Thin contemporary style - 4 1/4" x 12" x 1/8"
Decorative cylinders (x2) for shut-off valve and thermo control Diverter cartridge included
Handles (x2)
Fits 1/2" thermo valve 12123

FINISHES

Standard

Polished chrome (pc) Brushed nickel (bn)

Custom


15 custom finishes available (ask your local Aquabrass authorized dealer for details)


WARRANTY

Residential: Limited lifetime warranty to original purchaser

Commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)

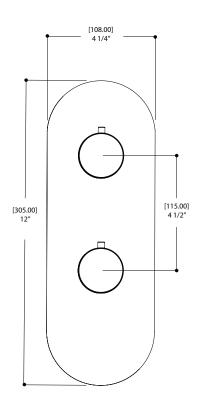




Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc.

last revision: 18/08/2016 aquabrass.com

recessed rainhead 801

8" x 8"



FEATURES

Stainless steel construction Pre-assembled Easy clip installation 1/2" NPT male connection

Flow rate: 2.5 gpm

Can also be used as a large wallmount body jet

FINISH


Standard

Polished stainless steel (pss)

WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)

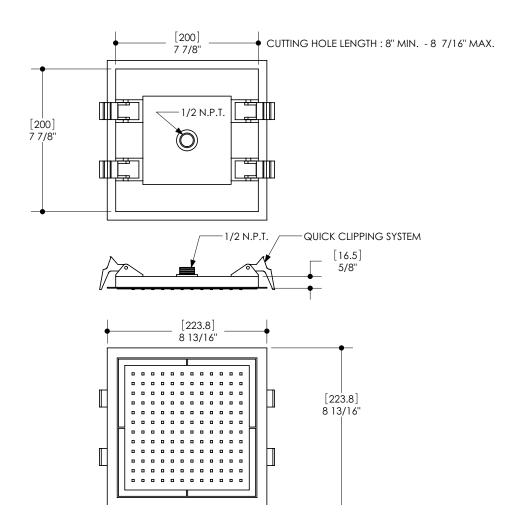


 $Products \ and \ specifications \ shown \ are \ subject \ to \ change \ without \ notice. \ Please \ contact \ our \ technical \ support \ at \ tech@aquabrass.com \ for \ any \ further \ queries, \ replacement \ parts \ requests \ etc.$

Last revision: 15/09/2016 aquabrass.com

aquarondo 12684

complete shower rail

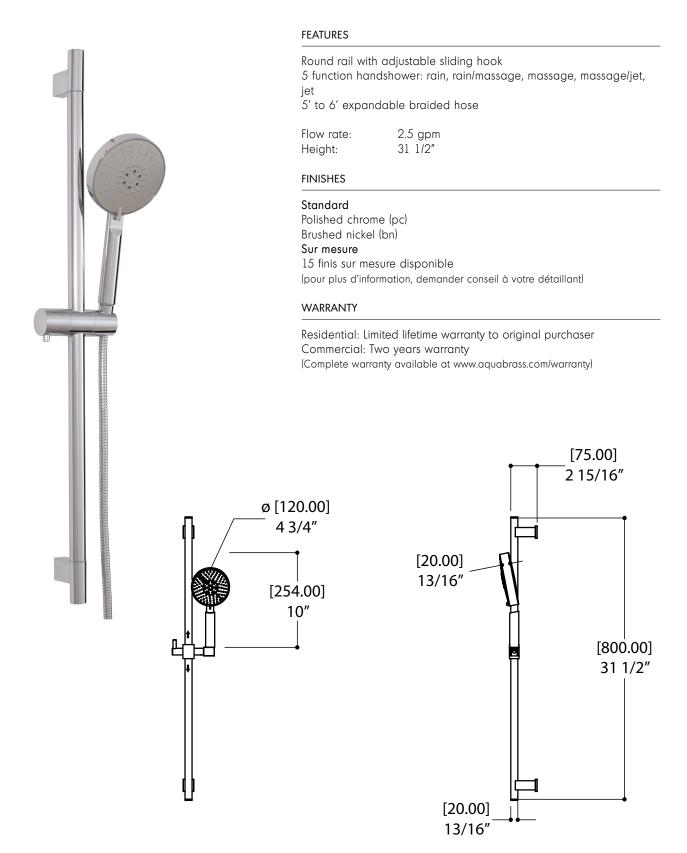

AQUABRASS adjustable waterway 1409



FEATURES

Thermo insulation body 5/8" trim adjustement to elbow installation 1/2" NPT female connection

FINISHES

Standard

Polished chrome (pc) Brushed nickel (bn)


15 Custom finishes available (ask your local Aquabrass authorized dealer for details)

WARRANTY

Residential: Limited lifetime warranty to original purchaser

Commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)

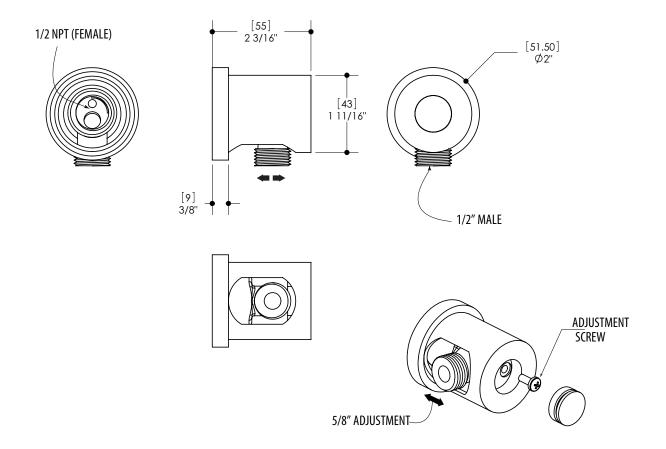


Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc. Last revision: 13/09/2016 aquabrass.com

adjustable waterway 1409

round

EXPLOSION PARTS

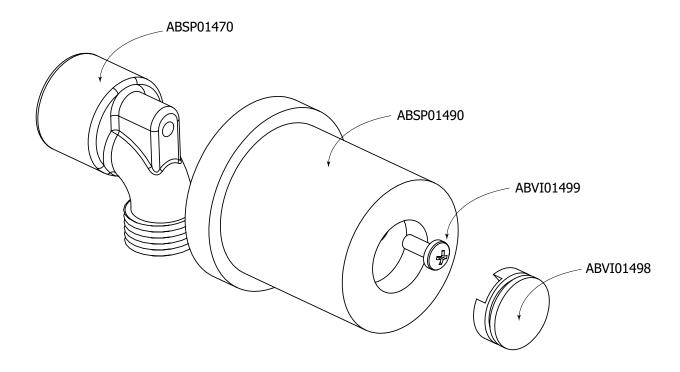

tub spout 11932

7" square wallmount cascading tub spout



FEATURES

Solid brass construction Non-diverter Cascading water flow 1/2" NPT male connection

FINISHES

Standard

Polished chrome (pc) Brushed nickel (bn)

Custom

15 Custom finishes available (ask your local Aquabrass authorized dealer for details)

WARRANTY

Residential: Limited lifetime warranty to original purchaser

Commercial: Two years warranty

(Complete warranty available at www.aquabrass.com/warranty)

