# aquakit U-22-011

## **Specifications**



# DEMI-TOTEM 12123

1/2" thermostatic valve with 2-way or 3-way diverter - CALGreen




#### FEATURES

High performance 1/2" thermostatic valve European made solid brass rough and thermo cartridge Safety temperature limit stopper, preset at 38C / 100F Reversible service check valves with filters / stop valves 1/2" NPT female connection (outlet/inlet) Diverter cartridge not included Available a third outlet if required

Flow rate: 12gpm at 45psi

#### WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty (Complete warranty available at www.aquabrass.com/warranty)

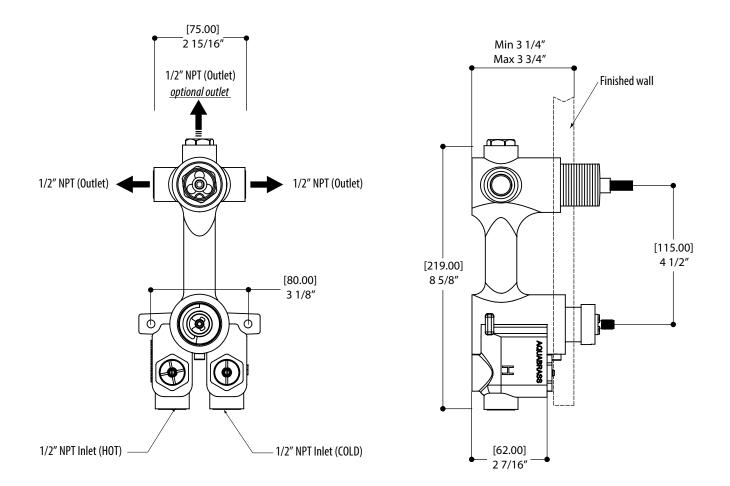

Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc. last revision: 16/09/2016 aquabrass.com





square

#### **FEATURES**

Solid brass construction Screwless decorative trim Thin contemporary style - 4 1/4" x 12" x 1/8" Decorative cylinders (x2) for shut-off valve and thermo control Diverter cartridge included Handles (x2) Fits 1/2" thermo valve 12123


#### **FINISHES**


Standard

Polished chrome (pc) Brushed nickel (bn) Custom 15 custom finishes available (ask your local Aquabrass authorized dealer for details)

#### WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty (Complete warranty available at www.aquabrass.com/warranty)

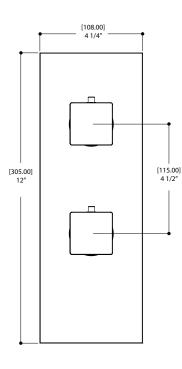



Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc. last revision: 18/08/2016

# aqua 2 12752

complete shower rail

#### FEATURES

Square handshower with 4" rotative head 5 function handshower: rain, soff pulsating jets Built-in backflow preventer Adjustable sliding handshower holder 5' to 6' expandable braided hose

Flow rate:	2.5 gpm
Height:	31 1/2"


#### **FINISHES**

#### Standard

Polished chrome (pc) Brushed nickel (bn) Custom 15 Custom finishes available (ask your local Aquabrass authorized dealer for details)

#### WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty (Complete warranty available at www.aquabrass.com/warranty)

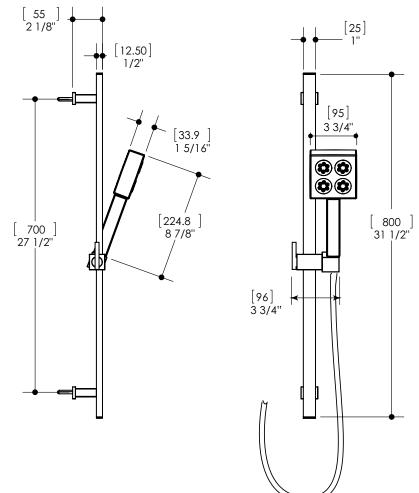

Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc. Last revision: 14/09/2016

# adjustable waterway 1408



#### FEATURES

Thermo insulation body 5/8" trim adjustement to elbow installation 1/2" NPT female connection


#### FINISHES

#### Standard

Polished chrome (pc) Brushed nickel (bn) **Custom** 15 Custom finishes available (ask your local Aquabrass authorized dealer for details)

#### WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty (Complete warranty available at www.aquabrass.com/warranty)

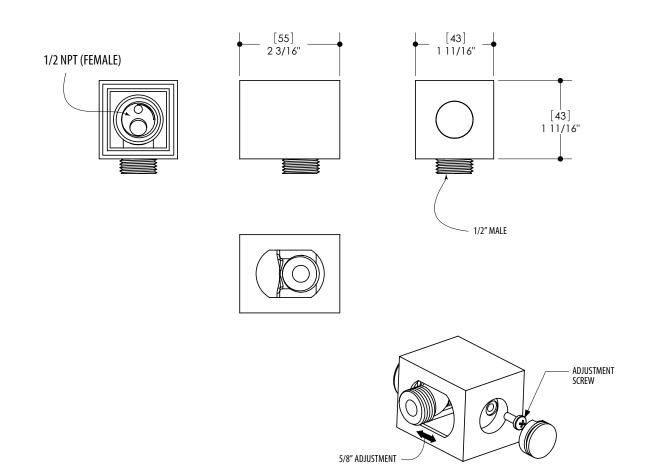

Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc.


square



# adjustable waterway 1408

square

**EXPLOSION PARTS** 

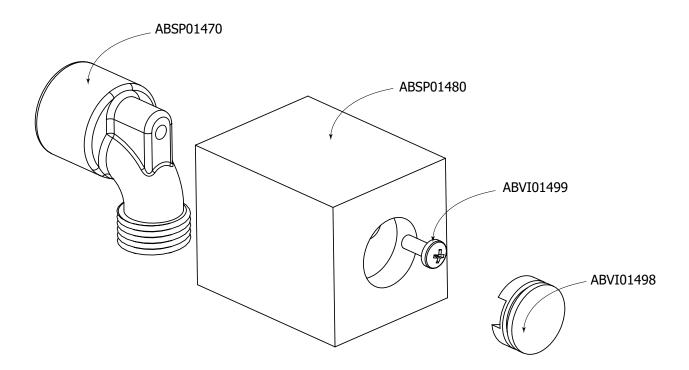

Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc.

# body jet 2565

square



Solid brass construction 1 function: jet Pivoting head 1/2" NPT connection

Flow rate: 1.5 gpm


#### **FINISHES**

#### Standard

Polished chrome (pc) Brushed nickel (bn) **Custom** 15 Custom finishes available (ask your local Aquabrass authorized dealer for details)

#### WARRANTY

Residential: Limited lifetime warranty to original purchaser Commercial: Two years warranty (Complete warranty available at www.aquabrass.com/warranty)



00

C

6

0


6 6

0

00

00

6



Products and specifications shown are subject to change without notice. Please contact our technical support at tech@aquabrass.com for any further queries, replacement parts requests etc.

Last revision:16/09/2016